



Megapixel IP Box Camera

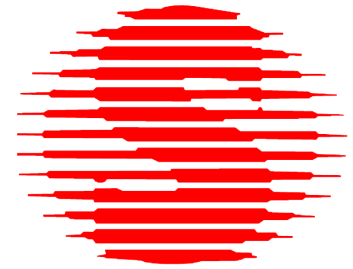


EIGENSCHAFTEN


- 1/3" Micron Progressive Scan CMOS
- Day and night function with Mechanical IR Cut Filter (CAMACIP19001IR)
- Bundled with f4.2mm / F1.8 Megapixel fixed lens
- 0.5 Lux (CAMACIP19000) / 0.05 Lux (CAMACIP19001IR) at F1.0
- Shutter Speed, White Balance, Exposure, Gain Controls supported
- Selectable MPEG-4 / MJPEG compression
- Up to SXGA resolution at 8 FPS
- Interchangeable Lenses Available
- Multi-stream with variable frame rate in the same compression
- Two-way audio supported
- Hardware motion detection, Digital Input / Output
- DC 12V or Power over Ethernet (IEEE 802.3af) supported

ABMESSUNGEN & ANSCHLÜSSE

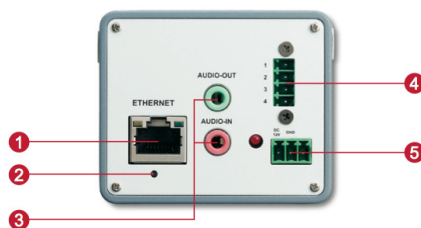


- | | |
|------------------------|--------------------------|
| ① Ethernet Port | ④ Digital Input / Output |
| ② Reset Button | ⑤ DC 12V Power Input |
| ③ Audio Input / Output | |

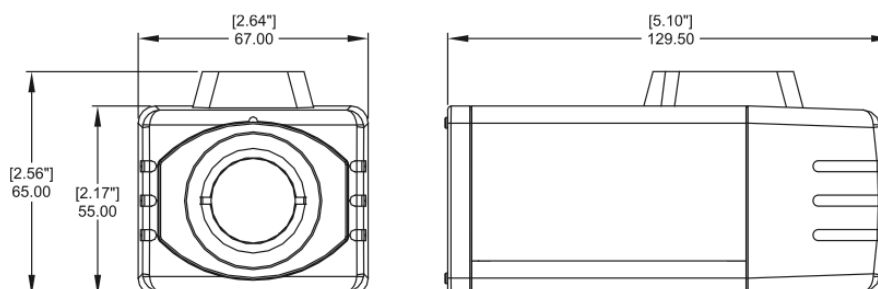



TECHNISCHE DATEN

Typ	CAMACIP19001	CAMACIP19001IR
Device	Micron Progressive Scan CMOS	
Size	1/3 inch	
Effective Pixels	1280(H) x 1024(V)	
Color	0.5 Lux at F1.0 (2400 °K, 30 IRE)	Color mode automatically switched to B/W mode under 4 Lux
B/W	N/A	0.05 Lux at F1.0 (2400°K,30 IRE)
CDS Sensor	N/A	Yes
IR Sensitivity	N/A	from 700 nm to 1100 nm
Lens Mount	C /CS (with adaptor)	
Focal Length	f4.2 mm / F1.8	
Viewing Angle	75° (Horizontal)	
Sync. System	Internal	
Mechanical IR Cut Filter	N/A	Yes
Motion Detection	Yes (3 Windows)	
Electronic Shutter	1/5 ~ 1/15,000 sec	
Fixed Shutter (Manual)	1/30 ~ 1/1,000 sec. (60Hz), 1/25 ~ 1/1,000 sec. (50Hz)	
Flickerless	1/120 sec. (60Hz), 1/100 sec. (50Hz)	
BLC	Yes	
AGC	Automatic (User defined)	
White Balance	AUTO,INDOOR1,INDOOR2,OUTDOOR1,OUTDOOR2, HOLD CURRENT,MANUAL	
S/N Ratio	Better than 44 dB	
Compression	MPEG-4 SP, MJPEG selectable	
Picture Resolution	SXGA (1280x1024); HD720 (1280x720); VGA (640x480); QVGA (320 x 240); QQVGA (160 x 112)	
Bit Rate	28 K ~ 3 M bps	
Image Frame Rate	8 fps at SXGA; 10 fps at HD720; 30 fps at VGA; 30 fps at QVGA; 30 fps at QQVGA	
Audio Compression	8kHz, Mono, PCM	
Audio Line Input	Unbalanced, 1.4Vp-p, 1Vrms, terminal block	
Audio Line Output	Unbalanced, 1.4Vp-p, 1Vrms, terminal block	
Alarm Digital Input	1, TTL, terminal block	
Alarm Digital Output	1, TTL, terminal block	
Reset Button	Factory default	
LED	System status	



TECHNISCHE DATEN

Ethernet Port	Ethernet(10/100 Base-T), RJ-45 Connector
Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP, DNS, DDNS, NTP, ICMP, IGMP, ARP
Web Browser	Microsoft Internet Explorer 6.0 or above
SDK	ACTi SDK-10000
Security	Password Protection: Configured by the Administrator
Temperature	0 °C ~ 50 °C (32 °F ~ 122 °F)
Power Requirement	PoE (IEEE802.3af) with Class 3
Power Consumption	3.3 W (DC 12V), 4.3 W (PoE)
Dimensions (WxHxL)	67 mm x 55 mm x 129.5 mm (2.64" x 2.17" x 5.10")
Weight	400 g (0.88 lb)
Certificate	CE, FCC